

SUPERMASTICK PR[®]



PRODUCT DATA SHEET
SUPERMASTICK Vinyl / Type II



PRODUCT DATA SHEET SUPERMASTICK Vinyl / Type II

DESCRIPTION

Supermastick PR® Vinyl Type II is a matte white vinyl that, thanks to its high coverage, adhesion, and low gloss, provides an excellent finish to drywall and masonry walls. Indoor use only. Supermastick PR® Vinyl is the ideal complement for Supermastick PR joint compound since they fit perfectly together to achieve homogeneous and smooth surfaces.

APPLICATIONS

- Drywall paint.
- Paint for masonry walls.
- Interior paint.

ADVANTAGES

- Matte white that reduces all finishing defects present in light construction systems (porosities and joints).
- High coverage and performance.
- Fast dry.
- Excellent leveling and adhesion.
- Does not crack

MIXED

If you are adding water, do not exceed more than the 20% of the weight of the product.

COMPOSITION

- Water, titanium dioxide, mineral fillers, and resin.
-

PRODUCT DATA SHEET SUPERMASTICK Vinyl / Type II


PRODUCT INFORMATION

Packing	<ul style="list-style-type: none">• 5 gallons• 1 gallon	
Storage Conditions	Storage time - 1 year in its original packaging, tightly closed in a cool and under cover place. Protect against extreme temperatures.	
Product Yield	1 gallon of paint covers 30 ² to one coat	
Parameters	pH	7.9 - 9.0
	Density (g/mL)	1.44 - 1.52 g/ml
	Viscosity	100 - 120 KU
	Finishing Color	Matte / White
	Solvent	Water


TECHNICAL PROPERTIES

PROPERTIES	NTC 1335	SUPERMASTICK
Abrasion resistance	50	>50
Stain removal	50%	>50%
Covering power	97%	>95%


APPLICATION

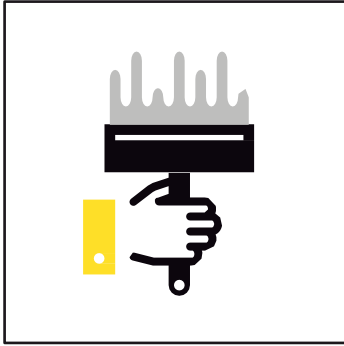

Apply each coat of coating with conventional brushes, paint rollers, or sprayers with or without air. It is recommended to use high quality applicators, since the final surface texture depends on them.

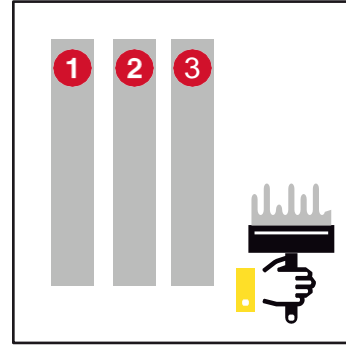

Apply three coats of paint for a perfect finishing on the surface.

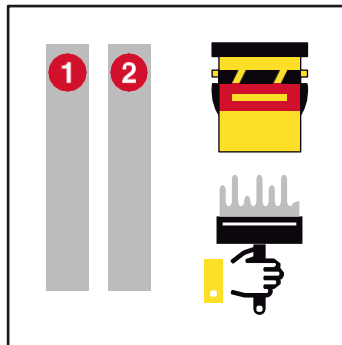

If you are working a Type V finishing with Supermastick PR joint compound, you can give a final finishing with two coats of Supermastick Vinyl / Type II.


STORAGE

Keep the product in its original container tightly closed in a dry indoor place away from heat sources. Try to mix with water only the product you are going to use, and do not store the product once you have added water.

PRODUCT DATA SHEET SUPERMASTICK Vinyl / Type II

SAFETY

Use appropriate personal protective equipment for handling (rubber gloves, goggles and wear respiratory protection when sanding). Consult the product safety sheet for more information.

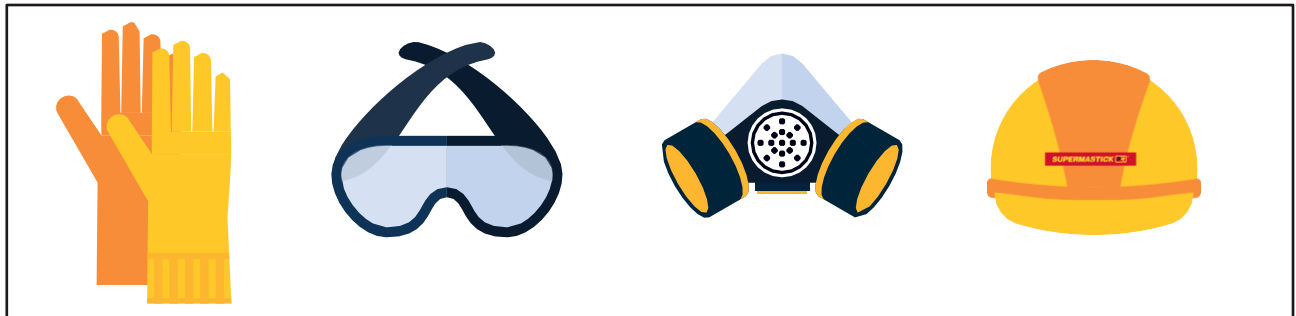

LIMITED WARRANTY

Supermastick S.A.S. HAS the power to make modifications to the information in this document without prior notice to the customers. It is not possible to consider all the regulations related to this product, therefore, the user must take these rules into account. All claims must be in writing and supported with evidence; Consult the Complaints and Claims Policy for more information related to claim times, requirements, conditions, response time, etc.

The client must not alter or repair the affected area until Supermastick S.A.S has reviewed the problem and determine a possible cause for the claim. The responsibility of Supermastick S.A.S is limited only to the replacement of defective material and is not responsible for incidental and unforeseen damages, direct or indirect, or for any loss caused by the application of these products that does not follow the instructions.
